



sim. ISO 7047 - **DIN 966 Z**
Raised countersunk head screws
 with cross recess Z (Pozidrive)

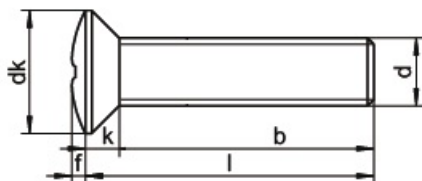

dk	3,8	4,7	5,6	7,5	9,2	11,0
f	0,50	0,60	0,75	1,00	1,25	1,50
k	1,20	1,50	1,65	2,20	2,50	3,00
b min.	16	18	19	22	25	28
⊕	Z 1	Z 1	Z 1	Z 2	Z 2	Z 3
Length / Ø	M2	M2,5	M3	M4	M5	M6
4	▲ ●	▲ ●	▲ ●			
5	▲ ●	▲ ●	▲ ●	▲ ●		
6	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
8	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
10	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
12	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
14		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
16		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
18		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
20		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
25			▲ ●	▲ ●	▲ ●	▲ ●
28			▲ ●	▲ ●	▲ ●	▲ ●
30			▲ ●	▲ ●	▲ ●	▲ ●
35			▲ ●	▲ ●	▲ ●	▲ ●
40			▲ ●	▲ ●	▲ ●	▲ ●
45			▲ ●	▲ ●	▲ ●	▲ ●
50			▲ ●	▲ ●	▲ ●	▲ ●
55				▲ ●	▲ ●	▲ ●
60				▲ ●	▲ ●	▲ ●
65				▲ ●	▲ ●	▲ ●
70				▲ ●	▲ ●	▲ ●
75					▲ ●	▲ ●
80					▲ ●	▲ ●
90					▲ ●	▲ ●
95					▲ ●	▲ ●
100					▲ ●	▲ ●

■ A1 / ▲ A2 / ● A4