


sim. ISO 7046 - **DIN 965 Z**
Countersunk flat head screws
 with cross recess Z (PoziDrive)

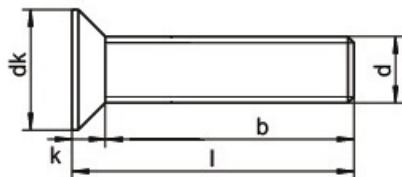

dk	3,0	3,8	4,7	5,6	7,5	9,2	11,0	14,5	18,0
k	0,96	1,20	1,50	1,65	2,20	2,50	3,00	4,00	5,00
b min.	15	16	18	19	22	25	28	34	40
⊕	Z 0	Z 1	Z 1	Z 1	Z 2	Z 2	Z 3	Z 4	Z 4
Length / Ø	M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10
3	▲ ●	▲ ●							
4	▲ ●	▲ ●	▲ ●	▲ ●					
5	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●				
6	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
8	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●		
10	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●		
12	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
14	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
16	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
18		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
20		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
22			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
25			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
30				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
35				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
40				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
55				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
65					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
70					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
75					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
80					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
85					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
90					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
95					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
100					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●

■ A1 / ▲ A2 / ● A4